


Stainless Steel Knurled Press Nut



Product Specification Sheet

Inch								
Part Number	Thread Size	A Max.	Min. Sheet Thickness	Hole Dia. + .003 in. - .000	B Max.	C ± .01	D ± .01	Min. Distance to Edge
BFSP-440-0	#4-40	.030	.030	.166	.165	.07	.25	0.19
BFSP-440-1		.038	.040					0.19
BFSP-440-2		.054	.056					0.19
BFSP-632-0	#6-32	.030	.030	.188	.187	.07	.28	0.22
BFSP-632-1		.038	.040					0.22
BFSP-632-2		.054	.056					0.22
BFSP-832-0	#8-32	.030	.030	.213	.212	.09	.31	0.27
BFSP-832-1		.038	.040					0.27
BFSP-832-2		.054	.056					0.27
BFSP-1032-0	#10-32	.030	.030	.250	.249	.09	.34	0.28
BFSP-1032-1		.038	.040					0.28
BFSP-1032-2		.054	.056					0.28
BFSP-420-1	1/4-20	.054	.056	.344	.343	.17	.44	0.34
BFSP-420-2		.087	.091					.344
Metric (mm)								
Part Number	Thread Size	A Max.	Min. Sheet Thickness	Hole Dia. +0.08 mm - .000	B Max.	C± .25	D± .25	Min.
BFSP-M3-0	M3 x 0.5	0.76	0.8	4.25	4.22	1.5	6.3	4.8
BFSP-M3-1		0.97	1.0					4.8
BFSP-M3-2		1.37	1.4					4.8
BFSP-M4-0	M4 x 0.7	0.76	0.8	5.40	5.38	2.0	7.9	6.9
BFSP-M4-1		0.97	1.0					6.9
BFSP-M4-2		1.37	1.4					6.9
BFSP-M5-0	M5 x 0.8	0.76	0.8	6.40	6.38	2.0	8.7	7.1
BFSP-M5-1		0.97	1.0					7.1
BFSP-M5-2		1.37	1.4					7.1
BFSP-M6-1	M6 x 1	1.37	1.4	8.75	8.72	4.1	11.1	8.6

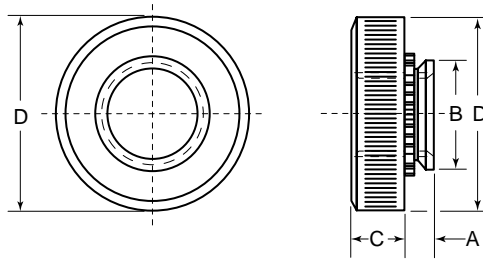

Material: Precipitation Hardening Grade Stainless Steel
 Finish: Passivated ASTMA380
 Thread: Class 2B, MIL-S-7742; (6H ISO metric)
 Use In: Materials with Rockwell Hardness of B-88 or less.



Buckeye Fasteners, Inc.

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2007 Buckeye Fasteners, Inc. All Rights Reserved

