


**Zinc Alloy
Thumb
Screw With
Shoulder**




**Product
Specification
Sheet**

Part Number	Thread Size	Head Diameter	Head Height	Collar Height	Collar Diameter	Thread Length L
		A	B	C	D	
BF 364165	#6-32	0.625	0.135	0.078	0.350	0.250
BF 364266	#8-32	0.625	0.135	0.078	0.350	0.375
BF 364367	#10-24	0.625	0.135	0.078	0.350	0.500
BF 364368	#10-32	0.625	0.135	0.078	0.350	0.500
BF 365371	1/4-20	0.750	0.165	0.140	0.487	0.500

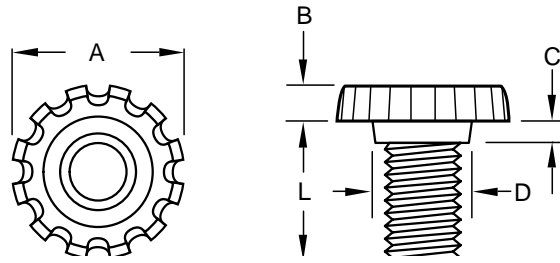

The generous proportions of the serrated head assure a firm grip during finger tightening. The collar under the head provides the proper spacing between the head and component for easy access.

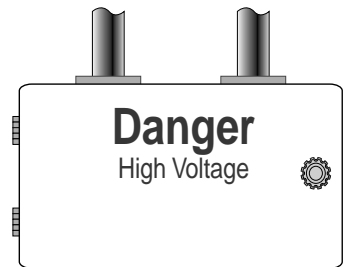

Material:.....Zinc Alloy SAE 903
 Finish:.....Plain, Unless Otherwise Specified
 Threads:.....Unified Class 2A ANSI B 1.1-1989

Tolerances:..... ±0.015
 Unless Otherwise Specified



Buckeye Fasteners, Inc.

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2007 Buckeye Fasteners, Inc. All Rights Reserved

