


**Zinc Alloy
Thumb
Screw With
Shoulder**




**Product
Specification
Sheet**

| Part Number | Thread Size | Head Diameter | Head Height | Collar Height | Collar Diameter | Thread Length L |
|-------------|-------------|---------------|-------------|---------------|-----------------|-----------------|
| | | A | B | C | D | |
| BF 364165 | #6-32 | 0.625 | 0.135 | 0.078 | 0.350 | 0.250 |
| BF 364266 | #8-32 | 0.625 | 0.135 | 0.078 | 0.350 | 0.375 |
| BF 364367 | #10-24 | 0.625 | 0.135 | 0.078 | 0.350 | 0.500 |
| BF 364368 | #10-32 | 0.625 | 0.135 | 0.078 | 0.350 | 0.500 |
| BF 365371 | 1/4-20 | 0.750 | 0.165 | 0.140 | 0.487 | 0.500 |

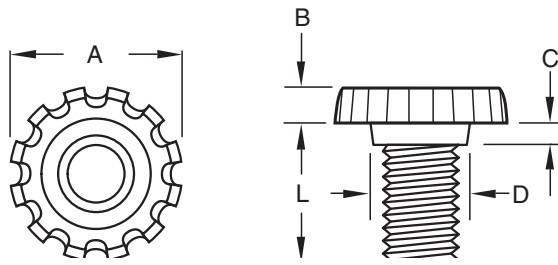

The generous proportions of the serrated head assure a firm grip during finger tightening. The collar under the head provides the proper spacing between the head and component for easy access.



Material: Zinc Alloy SAE 903
 Finish: Plain, Unless Otherwise Specified
 Threads: Unified Class 2A ANSI B 1.1-1989

Tolerances: ±0.015
 Unless Otherwise Specified



Buckeye Fasteners Company

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2012 Buckeye Fasteners, Inc. All Rights Reserved

