


**Metric Piloted
Hex Weld Nut
With Three
Projections**

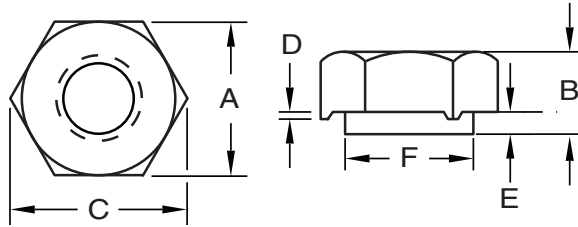


**Product
Specification
Sheet**

Part Number	Thread Size	A Width Across Flats	B Thickness	C Width Across Min.	D Proj. Height	E Pilot. Height	F Pilot Diameter
BF DIN929M3	M3 x 0.5 -6G	7.50	3.00	8.15	0.25	0.55	4.5
BF DIN929M4	M4 x 0.7-6G	9.00	3.50	9.38	0.35	0.65	6.0
BF DIN929M5	M5 x 0.8-6G	10.00	4.00	10.95	0.40	0.70	7.0
BF DIN929M6	M6 X 1.0-6G	11.00	5.00	12.02	0.45	0.75	8.0
BF DIN929M8	M8 X 1.25-6G	14.00	6.50	15.38	0.50	0.90	10.5
BF DIN929M10	M10 X 1.5-6G	17.00	8.00	18.74	0.65	1.15	12.5
BF DIN929M12	M12 X 1.75-6G	19.00	10.00	20.91	0.80	1.40	14.8
BF DIN929M14	M14 X 2.0-6G	22.00	11.00	24.27	1.00	1.80	16.8
BF DIN929M16	M16 X 2.0-6G	24.00	13.00	26.51	1.00	1.80	18.8

All Dimensions given in millimeters / For Reference Only



Three uniform projections ensure reliable contact with the weld surface, even if it is not perfectly flat. The precision pilot accurately locates the threads in the pilot hole and prevents the nut from slipping off center during welding.



Material: High Welding Quality, Low Carbon Steel
With a Max Carbon Content of 0.25%

Finish: Plain, Unless Specified

Threads: ASME B1.13M-2005



Buckeye Fasteners Company

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2012 Buckeye Fasteners, Inc. All Rights Reserved

