



**Adjustable
Leveler With
Protective
Base**

**Product
Specification
Sheet**

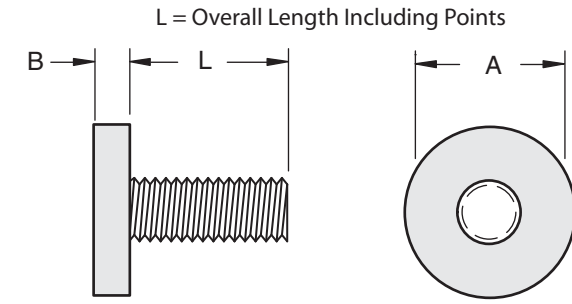

* FC • Sizes available with a slotted end for screw driver adjustments.

Part Number	Thread Size	Thread Length	Base	
			Base Diameter	Thickness Surface
			A	B
FC 2116	1/4-20	1.000	0.812	0.312
FC 2120	1/4-20	1.250	0.812	0.312
FC 2708	5/16-18	0.500	1.000	0.312
FC 2716	5/16-18	1.000	1.000	0.312
FC 2720	5/16-18	1.250	1.000	0.312
FC 2723 *	5/16-18	1.500	1.000	0.312
FC 2724	5/16-18	1.500	1.000	0.312
FC 3320	3/8-16	1.250	1.125	0.312
FC 3323 *	3/8-16	1.500	1.125	0.312
FC 3324	3/8-16	1.500	1.125	0.312
FC 3331 *	3/8-16	2.000	1.125	0.312
FC 3339 *	3/8-16	2.500	1.125	0.312
FC 3340	3/8-16	2.500	1.125	0.312
FC 4440	1/2-13	2.500	1.375	0.375
Length (L) Tolerance	To 1 Inch + .00 -.03	Over 1" to 2" (Inclusive) + .00 -.06	Over 2" + .00 -.09	



The FC adjustable leveler combines the rugged features of Ohio Nut and Bolt's FH leveler with a sturdy LC leveler cap to produce an economical cushioned leveler that is both durable and attractive. The resilient, non-marking properties of the polyethylene pad make the FC ideal for use on linoleum, vinyl tile and polished floors.



Material:C1010 High-Welding Quality, Low Carbon Steel Finish: Plain, Unless Specified

Threads: Unified Standard Class 2A ASME B1.1-2003



Buckeye Fasteners Company

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2012 Buckeye Fasteners, Inc. All Rights Reserved

