



OHIO

HF & LN Special Purpose Parts



Part Number	Thread Size	Thickness (Overall)	Flange		Hex Across The Flats
			Diameter	Height	
		L	A	B	D
HF 2707	5/16-18	0.375	1.000	0.125	0.500

Widely used as a hold down nut on springs, the HF nut features strong, one piece, cold forged construction which has a hexagon shaped body with a large round flange. The wide flange allows the HF nut to be ARC welded in place. It may also be used to bridge oversize holes or where extra bearing surface is required for additional strength, or to prevent embedding.

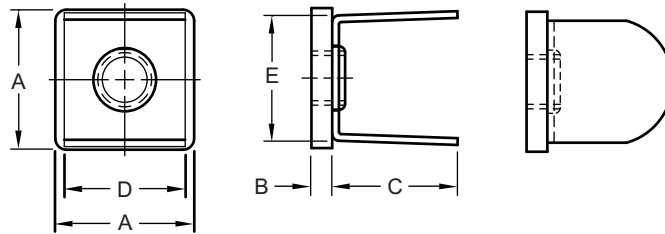

Part Number	Thread Size	Base		Leg		Width Of Stamping
		Width	Thickness	Length	Width	
		A	B	C	D	
LN 2788	5/16-18	0.968	0.125	0.875	0.843	0.870 0.860
LN 3388	3/8-16	0.968	0.125	0.875	0.843	0.870 0.860

The LN insert fits inside a 1 inch, 16 gage square tube, snapping easily into place. The threaded base is slightly larger than the U shaped stamping to provide a strong bearing surface on the tubing edge.

Material:C1010 High-Welding Quality, Low Carbon Steel

Finish:Plain, Unless Specified

Threads:Unified Standard Class 2B ASME B1.1-2003



The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

www.BuckeyeFasteners.com

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

