


# PDZ Stainless Steel Weld Screw



Thread Size		#6-32	#8-32	#10-24	#10-32	1/4-20	5/16-18
Spade Width (Ref.)	A	0.218	0.250	0.312	0.343	0.375	0.437
Spade Thickness	B	0.052	0.067	0.067	0.067	0.099	0.130
		0.042	0.057	0.057	0.057	0.089	0.120
Spade Length (Ref.)	C	0.438	0.500	0.625	0.625	0.750	0.875
Projections	G-Diameter	0.105	0.115	0.130	0.130	0.165	0.185
	H-Height	0.020	0.023	0.025	0.025	0.027	0.033
		0.014	0.017	0.019	0.019	0.021	0.027
Length (Overall) - L	Min. Thread Length (T)	#6-32	#8-32	#10-24	#10-32	1/4-20	5/16-18
	7/8	3/8	PDZ 1114				
	1	3/8		PDZ 1416			
	1-1/4	5/8		PDZ 1420			
	1-1/4	3/8				PDZ 2120	
	1-1/2	3/4			PDZ 1524	PDZ 1624	
	1-1/2	5/8				PDZ 2124	
	1-1/2	7/16					PDZ 2724
	1-3/4	7/8				PDZ 2128	
	1-3/4	11/16					PDZ 2728
	2	1-1/8				PDZ 2132	
	2-1/4	1-3/8				PDZ 2136	

Cold formed for great strength and accuracy, the stainless steel PDZ weld screw has an offset spade with two weld projections. This feature enables the PDZ to be used where a threaded fastener is required on the edge of a sheet or on the side of a component part.

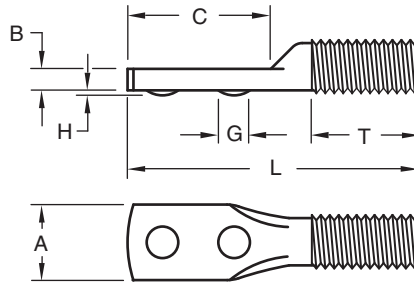

The PDZ weld screw is particularly useful for mounting covers or lids and, in addition, can be conveniently welded on tubing or curved surfaces. Stainless steel PDZ weld screws not only make assembly of components easier, but they contribute to better product performance by providing a strong, durable fastening method.



Recommended hole in sheet is .015 above the major diameter.

Material: ..... Austenitic Stainless Steel

Finish: ..... Passivated

Threads: ..... Unified Standard Class 2A  
ASME B1.1-2003



## The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

[www.BuckeyeFasteners.com](http://www.BuckeyeFasteners.com)

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

