


# OHIO


# RWZ Stainless Steel Weld Screw



Thread Size		#6-32	#8-32	#10-32	1/4-20	5/16-18	3/8-16
Head	A-Diameter	0.323 0.303	0.385 0.365	0.448 0.428	0.575 0.550	0.755 0.725	0.880 0.850
	H-Height	0.052 0.042	0.068 0.058	0.068 0.058	0.083 0.073	0.099 0.089	0.114 0.104
Projections	E-Width (Ref.)	0.025	0.031	0.035	0.048	0.060	0.068
	F-Height	0.015 0.010	0.018 0.013	0.020 0.015	0.027 0.021	0.033 0.027	0.037 0.031
Length (From Under The Head)	3/8	RWZ 1106	RWZ 1406				
	1/2		RWZ 1408	RWZ 1608	RWZ 2108		
	5/8			RWZ 1610	RWZ 2110	RWZ 2710	
Tolerance +0.00 -0.03	3/4				RWZ 2112	RWZ 2712	RWZ 3312
	7/8				RWZ 2114		
Over 1" to 2" (Inclusive) +0.00 -0.06	1		RWZ 1416		RWZ 2116	RWZ 2716	RWZ 3316
	1-1/4			RWZ 1620	RWZ 2120	RWZ 2720	RWZ 3320
	2					RWZ 2732	

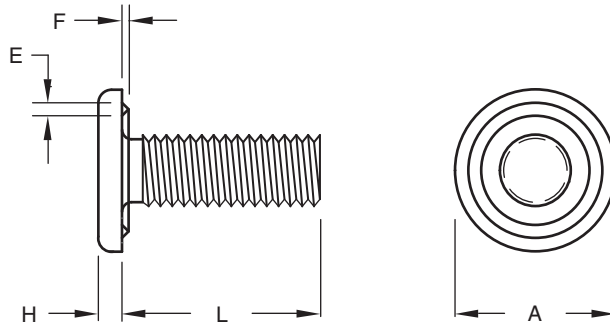

The stainless steel RWZ weld screw, for through-hole applications, features a 360° ring projection that provides a completely circular weld seal. The large weld area on the RWZ gives great weld strength which can be used in applications requiring additional weld strength. The full ring projection is also ideal for cross wire welding or welding to screen, perforated metal or tubing. The RWZ stainless steel weld screw is found on applications in the air conditioning and refrigeration fields where a leak proof seal is necessary. Recommended hole in sheet is .015 above the major diameter.



Material: ..... Austenitic Stainless Steel

Finish: ..... Passivated

Threads: ..... Unified Standard Class 2A  
ASME B1.1-2003



## The Ohio Nut and Bolt Company

Sales Office: Buckeye Fasteners • "Your Factory Source"

5250 West 164th Street • Cleveland Ohio 44142

Ph: (800)-437-1689 • Ph: (216)-267-2240 • Fax: (216) 267-3228

[www.BuckeyeFasteners.com](http://www.BuckeyeFasteners.com)

A Division of Fastener Industries Inc. — An Employee Owned Company

© Copyright 2012 The Ohio Nut and Bolt Company

