


Stainless Steel Single Projection Tab Weld Nut




Product Specification Sheet

Part Number	Thread Size	Width	Thickness	Length	Pilot		Projection		Center Hole To Short End	Hole In Sheet
					Dia.	Height	Dia.	Height		
					E	F	G	H		
PNZ 1406	#8-32	0.390	0.097	0.640	0.213	0.03	0.193	0.014	0.202	0.219
		0.370	0.091	0.610	0.193		0.183	0.010	0.172	
PNZ 1506	#10-24	0.390	0.097	0.640	0.244	0.03	0.193	0.014	0.202	0.250
		0.370	0.091	0.610	0.224		0.183	0.010	0.172	
PNZ 1706	#10-32	0.390	0.097	0.640	0.244	0.03	0.193	0.014	0.202	0.250
		0.370	0.091	0.610	0.224		0.183	0.010	0.172	
PNZ 2113	1/4-20	0.520	0.128	0.827	0.307	0.05	0.224	0.025	0.265	0.312
		0.495	0.122	0.797	0.287		0.214	0.021	0.235	
PNZ 2213	1/4-28	0.520	0.128	0.827	0.307	0.05	0.224	0.025	0.265	0.312
		0.495	0.122	0.797	0.287		0.214	0.021	0.235	
PNZ 2718	5/16-18	0.655	0.145	1.140	0.369	0.08	0.317	0.029	0.359	0.375
		0.620	0.139	1.110	0.349		0.307	0.025	0.329	
PNZ 3318	3/8-16	0.655	0.145	1.140	0.448	0.09	0.317	0.029	0.359	0.453
		0.620	0.139	1.110	0.428		0.307	0.025	0.329	
PNZ 3418	3/8-24	0.655	0.145	1.140	0.448	0.09	0.317	0.029	0.359	0.453
		0.620	0.139	1.110	0.428		0.307	0.025	0.329	

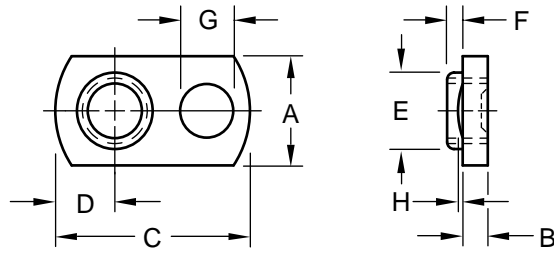

The PNZ stainless steel weld nut features a strong single button projection which gives a deeper, more penetrating weld than is ordinarily obtained from other types of projections. Thus, the PNZ is ideal for use with heavier gage material. The PNZ weld nut is easy to position on both flat and curved surfaces and has a self-locating pilot that provides more thread depth. Use of the PNZ nut assures a positive and permanent fastener foundation.



Material: 18-8 Stainless Steel
 Finish: Passivated
 Threads: Unified Standard Class 2B
 ASME B1.1-2003

Tensile Strength: 80,000 psi
 Yield Point: 35,000 psi
 Elongation 2" 55%



Buckeye Fasteners, Inc.

5250 West 164th Street • Brook Park, Ohio 44142-1597

(800) 437-1689 • Fax: (216) 267-3228

buckeyefasteners.com • info@buckeyefasteners.com

© 2007 Buckeye Fasteners, Inc. All Rights Reserved

